


Features

- Superior attenuation of common-mode noise
- Light weight plastic housing design
- Current rating 1A~30A
- Integrated nut is in hinged cover for reliable ring lug wiring
- Suitable for generally industrial appliaces

Marketing Applications

- UPS
- Automated LED sorting machine
- Treadmill
- Building automation
- Automatic data processing system

Electrical Schematic

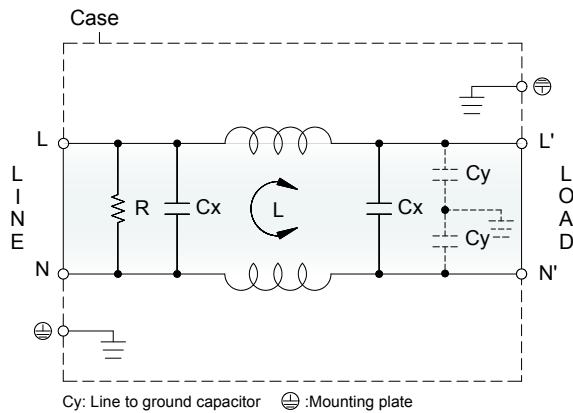

Special Features


- CNAC series: best frequency bands from 150kHz~1MHz.
- CNAH series: best frequency bands from 10kHz~1MHz.
- CNAP series: high-voltage pulses.

Technical Data and Measuring Conditions

No.	■ CNAC series Filter PRJ No.	01CNAC472	03CNAC472	06CNAC472	10CNAC472	15CNAC472	20CNAC472	30CNAC472	
	■ CNAH series Filter PRJ No.	01CNAH472	03CNAH472	06CNAH472	10CNAH472	15CNAH472	20CNAH472	30CNAH472	
	■ CNAP series Filter PRJ No.	01CNAP472	03CNAP472	06CNAP472	10CNAP472	15CNAP472	20CNAP472	30CNAP472	
1	Rated voltage	AC 1∅ 250V / DC250V							
2	Rated current	1A	3A	6A	10A	15A	20A	30A	
3	Test voltage	2,500 VAC (Cutoff current: 20mA), 1 min. at room temperature and humidity							
4	Isolation resistance	500VDC 100MΩ min. at room temperature and humidity							
5	Leakage current	1mA @250VAC/60Hz (max.)							
6	Cy cap. value	0 ~ 0.47nF							
7	Voltage drop	1.0V max.							
8	Safety approval temp.	-25° ~ +100°							
9	Operating temperature	-40° ~ +100°							
10	Operating humidity	20 ~ 95%RH (Non condensing)							
11	Storage temp. / humidity	-40° ~ +100°; 20 ~ 95%RH (Non condensing)							
12	Vibration	10 ~ 55Hz, 19.6m/s ² (2G), 3 min. period, 1 hour each X,Y,Z axis							
13	Impact	196.1m/s ² (20G), 11ms, once along X,Y,Z axis							
14	Safety approvals	UL1283, CSA C22.2 No.8 (C-UL), VDE0565 Teil3-1, IEC/EN60939							

Mechanical Drawing (unit: mm)

● Chassis mounting

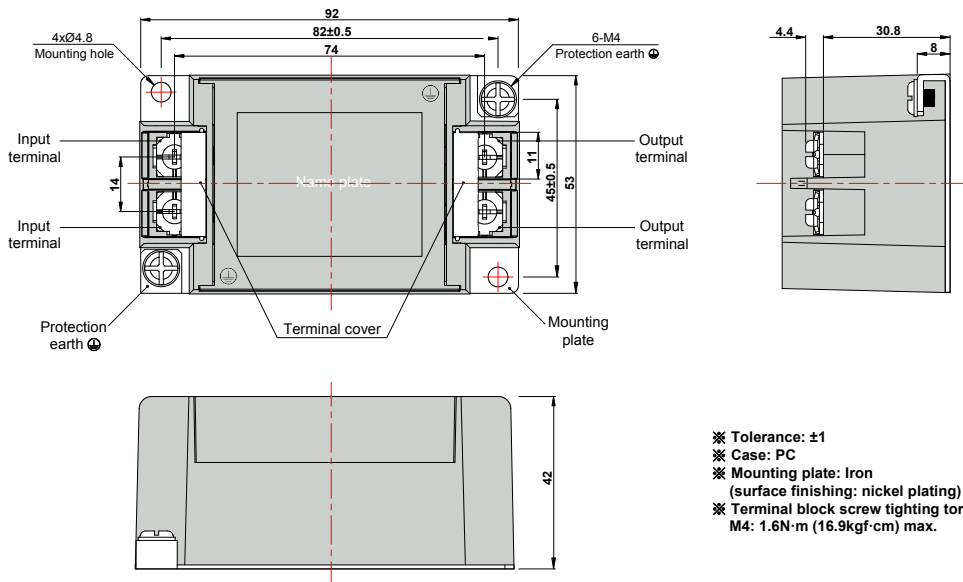

- ※ Tolerance: ±1
- ※ Case: PC
- ※ Mounting plate: Iron (surface finishing: nickel plating) t= 1.2
- ※ Terminal block screw tightening torque M4: 1.6N·m (16.9kgf·cm) max.