

SPECIFICATION OF WCM-□□□□AUTO SERIES

AEC-Q200




FEATURES

- Wire-wound common mode choke coil
- Common mode EMC Solution
- Compatible with RoHS Directive and AEC-Q200
- Compatible with Automotive required operating temperature
-40 to +125°C

APPLICATIONS




Preventive measure against high speed transmission signal
for FlexRay, CAN/CAN-FD system

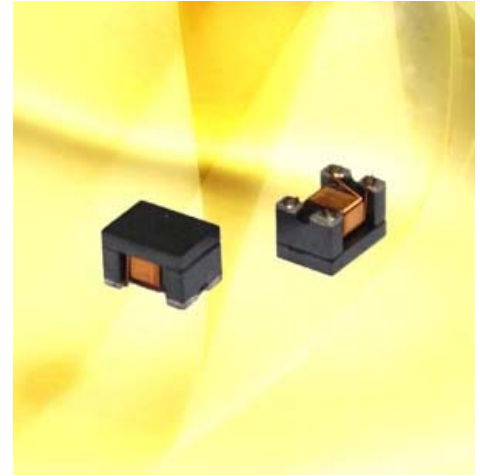

ORDERING CODE

WCM-4532AUTO-101 Y T
(1) (2) (3) (4) (5)

- (1) PRODUCT TYPE CODE
- (2) PRODUCT SIZE & DESIGN CODE
- (3) INDUCTANCE CODE
- (4) TOLERANCE
- (5) TAPING CODE

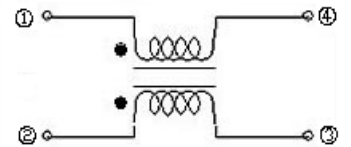

APPEARANCE & DIMENSIONS

UNIT:mm (inch)

SIZE CODE	A	B	C	D1 TYP	D2 TYP	F TYP	G TYP	H TYP	I TYP		
WCM-3225AUTO	3.30±0.20	2.60±0.20	2.40±0.20	0.50	0.90	0.60	3.50	1.60	4.00		
(1210)	(0.13±0.008)	(0.102±0.008)	(0.094±0.008)	(0.019)	(0.035)	(0.024)	(0.138)	(0.063)	(0.157)		
WCM-4532AUTO	4.50±0.20	3.20±0.20	2.80+0.35(-0.2)	1.00	1.20	0.40	3.60	2.10	4.90		
(1812)	(0.177±0.008)	(0.126±0.008)	(0.110±0.008)	(0.039)	(0.039)	(0.016)	(0.141)	(0.082)	(0.192)		


※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

COMMON MODE CHOKE → WCM-4532AUTO SERIES


ELECTRICAL CHARACTERISTICS

ORDERING CODE	INDUCTANCE (uH) 100KHz/100mV	IMPEDANCE (Ω)TYP (Ω)10MHz	DC Resistance (Ω) max	IDC (mA) max	Rated Voltage V (DC)	Insulation Resistance (mΩ) min
WCM-4532AUTO-110YT	11+50(-30)%	600	0.6	250	50	10
WCM-4532AUTO-220YT	22+50(-30)%	1200	1.0	200	50	10
WCM-4532AUTO-510YT	51+50(-30)%	2800	1.0	200	50	10
WCM-4532AUTO-101YT	100+50(-30)%	5800	2.0	150	50	10
WCM-4532AUTO-201YT13	200+60(-20)	13000	4.5	100	50	10


WCM-4532AUTO-110YT

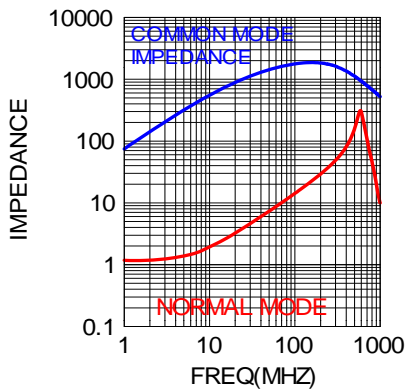


WCM-4532AUTO-220YT

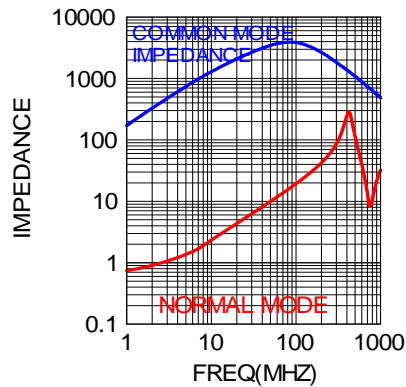


WCM-4532AUTO-510YT

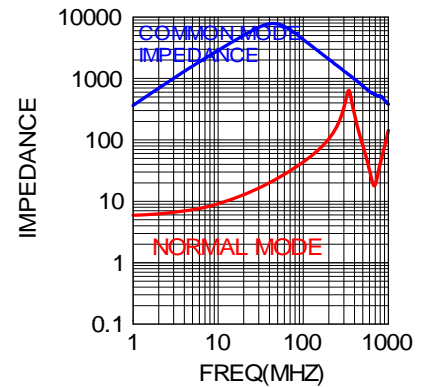

WCM-4532AUTO-101YT

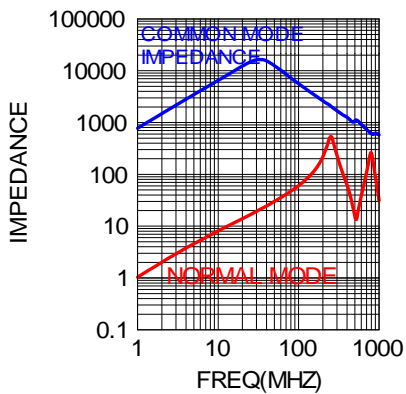

WCM-4532AUTO-201YT13

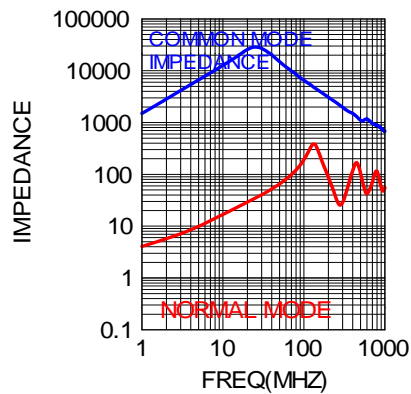

※Operating temperature range : -40 to +125°C (including self-generated heat)

* Design as Customer's Requested Specifications.

※All the data listed in this catalogue are for reference only, King Core reserves the right to alter or revise the specifications without prior notification.

